




## Shutting down a Physical BrickStor Appliance

To shut down using the BrickStor SP Manager:

1. From the BrickStor SP Manager Connections pane, select the System Menu from the right menu bar.
2. In the Advanced pane, tick the Shutdown Box

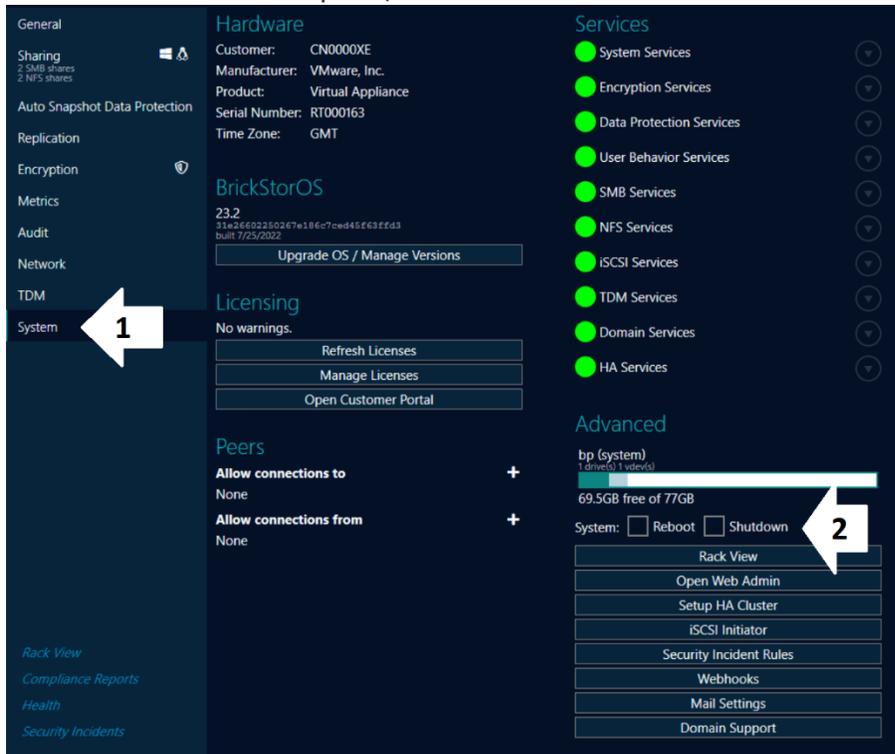

3. Once you click the "Shutdown" box, an acknowledgment window will appear from the right of the screen, tick the acknowledge box.
4. Type your shutdown reason in the message box and click the Commit button and the unit will power down after 1 minute




5. Once the Appliance has shutdown, it will power itself off



## Power down the attached storage enclosure/s:

After the BrickStor appliance has powered off you are able to power down the attached Storage Enclosure/s. The Power buttons for the enclosures is located on the Rear on each Power Module of the 2U, 4U and 5U Storage enclosures. There are 2 power modules for each Enclosure. Toggle each button to the off position

- **Diagram of 2U and 4U enclosure Power Module**

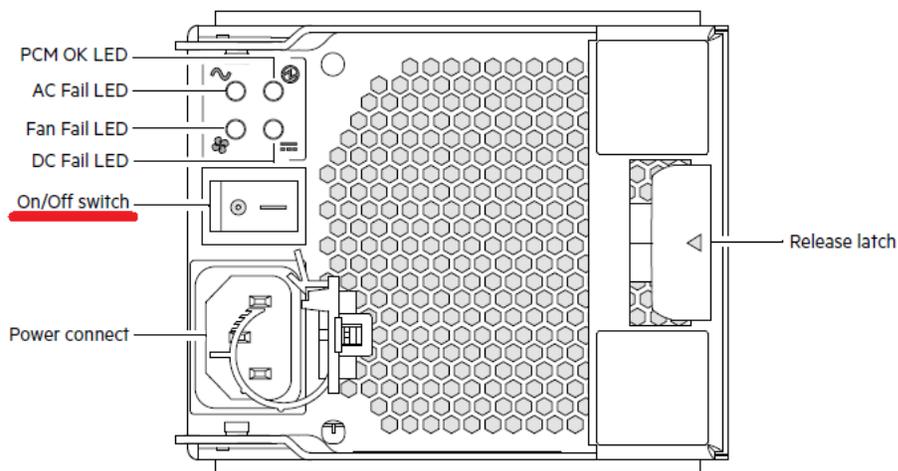

- **Diagram of 5U enclosure Power Module**

